

CITY UPS

Line Interactive UPS



Affordable Compact UPS for Office Desktop Systems and IT Equipments



- Digital Microprocessor Controlled for High Reliability Design
- Built-in Automatic Voltage Regulator for Voltage Stabilization
- Auto Restart after AC recovering from Battery low
- Cold Start and Off Charging Mode
- LCD Panel for UPS operating status
- British Outlets with Safety Shutter for City800 and City1200
- Universal Outlets for City800-USB
- Built-in Ventilation fan (for City1200 only)
- Generator Compatible
- HID USB Communication Port for City800-USB and City1200-USB
- Bundled with PowerMaster Management Software with Cloud Capability by Subscription

CITY UPS

Line Interactive UPS

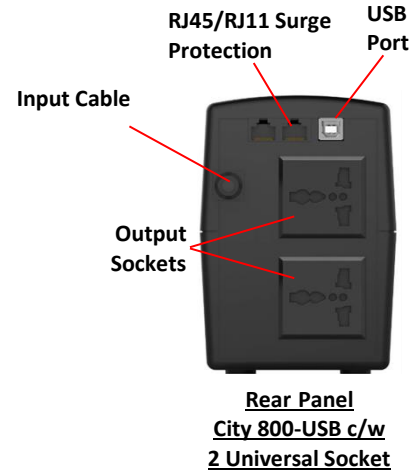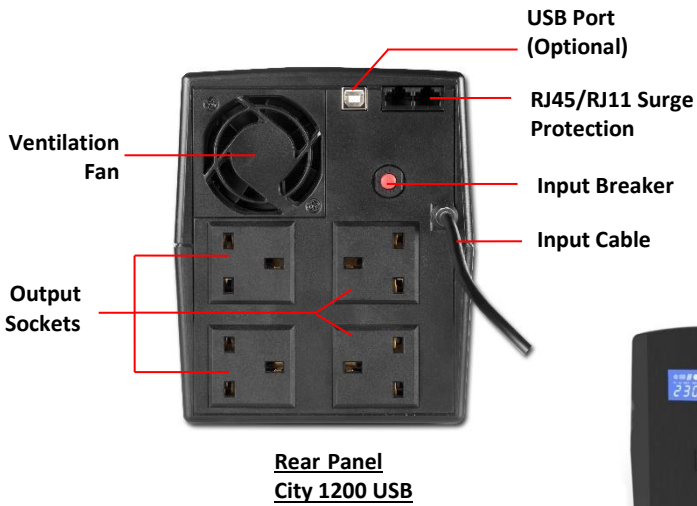

Technical Specifications

Models		CITY 800-USB	CITY 1200-USB
Power Rating		800VA	1200VA
Input	Nominal	220V-240V	
	Range	162-290Vac	
	Frequency	50/60Hz Hz (Auto sensing)	
Output	Nominal	220V-240V	
	Regulation (Battery)	230V +/-10%	
	Frequency (Battery)	50 / 60 Hz +/- 1%	
	Waveform (Battery)	Simulated Sinewave	
	Overload Protection	Circuit Breaker or Inner Firmware Protection	
	Outlets	2 x Universal	4 x British
Battery	Rating (QTY)	12V 7AH (1)	12V9AH (2)
	Type	Sealed Lead Acid Maintenance Free	
	Recharge Time	6-8 Hours to 90% After Complete Discharge	
Transfer Time	Response Time	Typically 2-4 ms	
Audible Alarm	Beeping	Battery Mode, Battery Low, Overload & Fault	
Display	LCD	Display Output and Input voltage, Load & Battery percentage and Operating mode	
Surge Protection	Modem/Telephone	RJ45/11 Port	
Interface	Communication Port	USB	
Physical	Dimension HxWxD, mm	138 x 96x 286	178 x 148 x 298
	Weight, Kg	4.5	8.7
Operating Environment	Temperature	0 to 40 °C	
	Humidity	0 - 90% without condensation	
	Noise Level	Less than 40dB at 1 meter	

**Back-up time depending on Battery health, load and operating environment.
Specification subject to change without prior notice